NONRESIDENTIAL ALTERNATIVE CALCULATION METHOD (ACM) APPROVAL MANUAL

for the

2005 BUILDING ENERGY EFFICIENCY STANDARDS FOR RESIDENTIAL AND NONRESIDENTIAL BUILDINGS

CALIFORNIA ENERGY COMMISSION

STANDARDS/REGULATIONS

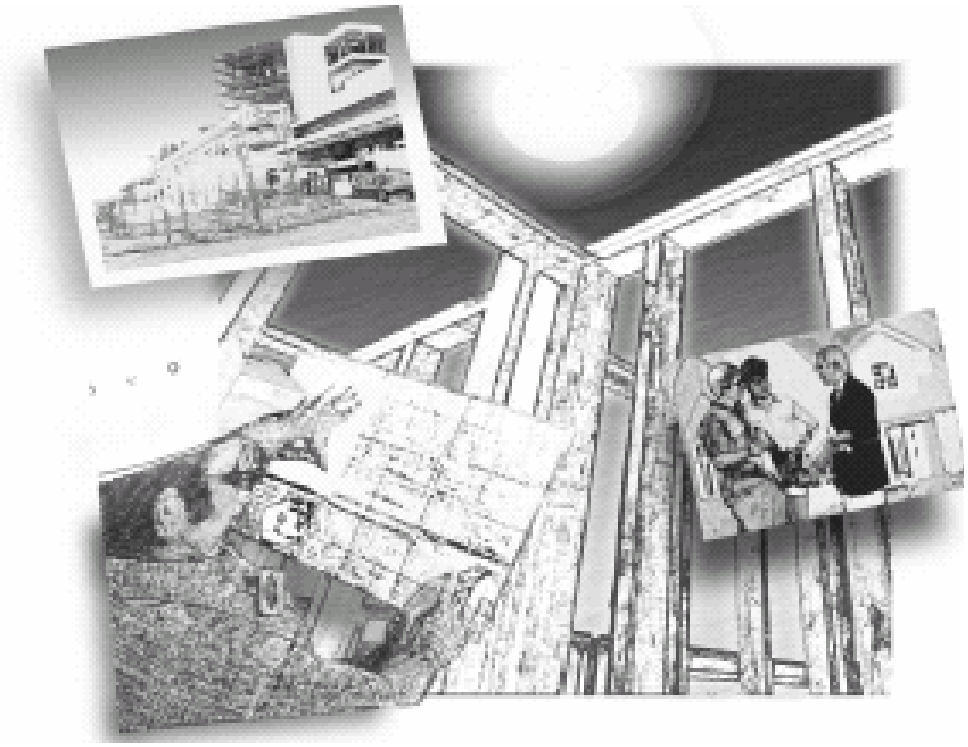

OCTOBER 2004
P400-03-004F-M

Effective October 1, 2005

This version of the Nonresidential ACM Methods Approval Manual is the **marked** final version indicating the changes from the 2001 Standards

Arnold Schwarzenegger, *Governor*

CALIFORNIA ENERGY COMMISSION

William J. Keese,
Chairman

Commissioners:
Arthur H. Rosenfeld
James D. Boyd
John L. Geesman
Jackalyne Pfannenstiel

Robert L. Therkelsen,
Executive Director

G. William Pennington,
Manager
BUILDINGS AND APPLIANCES OFFICE

Valerie T. Hall,
Deputy Director
ENERGY EFFICIENCY AND DEMAND ANALYSIS DIVISION

LEGEND

(EXPLANATION OF MARKINGS)

for the 2005 Building Energy Efficiency Standards and Associated Documents

This version of the 2005 Nonresidential Alternative Calculation Method (ACM) Approval Manual shows the changes from the 2001 Residential ACM Manual. The addition and deletion markings are as listed below. A version with no markings that includes all the changes is available online at www.energy.ca.gov/title24 or from the California Energy Commission's Publications Office at 916/654-5200.

1. Language added to the 2001 Standards during the initial 45-day review period appears in single underline.

2. Language deleted from the 2001 Standards during the initial 45-day review period appears in ~~single strikeout~~.

3. Language added during the second review period of 15 days appears in double underline.

4. Language deleted during the second review period of 15 days appears in ~~double strikeout~~.

Note that errata adopted after the 15-day review period may appear in both double underline and double strikeout.

Table of Contents

1. Overview of Process....1-1
1.1 Application Checklist....1-3
1.2 Types of Approval....1-4
1.2.1 Full Approval & Re-Approval of Alternative Calculations Methods (ACMs)....1-5
1.2.2 Approval of New Features & Updates....1-5
1.3 Challenges....1-6
1.4 Alternative ACM Tests....1-6
1.5 Decertification of Alternative Calculation Methods (ACMs)....1-6

2. Required ACM Capabilities....2-1
2.1 Compliance....2-1
2.1.1 Type of Project Submittal....2-1
2.1.2 New Building or Addition Alone....2-2
2.1.3 Scope of Compliance Calculations....2-2
2.1.4 Climate Zones....2-4
2.1.5 Reference Year....2-4
2.1.6 Time Dependent Valuation....2-5
2.1.7 Reference Method Comparison Tests....2-5
2.2 Compliance Documentation....2-6
2.2.1 Certificate of Compliance Form(s)....2-9
2.2.2 Supporting Compliance Forms....2-10
2.3 Building Shell....2-13
2.3.1 Spaces....2-13
2.3.2 Construction Assemblies....2-17
2.3.3 Above-Grade Opaque Envelope....2-27
2.3.4 Interior Surfaces....2-29
2.3.5 Fenestration and Doors....2-30
2.3.6 Below-Grade Envelope....2-40
2.4 Building Occupancy....2-41
2.4.1 Assignment....2-41
2.4.2 Lighting Power....2-51
2.4.3 Schedules....2-55
2.5 HVAC Systems and Plants....2-64
2.5.1 Thermal Zoning....2-65
2.5.2 Heating & Cooling Equipment....2-65
2.5.3 Air Distribution Systems....2-91
2.6 Service Water Heating....2-127
2.6.1 Nonresidential Service Water Heating (Including Hotels Guest Rooms)....2-127
2.6.2 High-Rise Residential Water Heating Calculation Methods....2-131

3. Optional Capabilities....3-1
3.1 Alternations and Additions....3-1
3.1.1 Additions & Alterations....3-2
3.1.2 Alteration or Addition Plus Altered Existing....3-2
3.1.3 Duct Sealing in Additions and Alterations....3-2
3.1.4 Output Reports for Existing Buildings....3-3
3.2 Building Occupancy....3-10
3.2.1 Alternate Occupancy Selection Lists....3-10
3.2.2 Lighting Controls....3-15
3.2.3 Light Heat to Zone....3-16
3.3 HVAC Systems and Plants....3-16
3.3.1 Absorption Cooling Equipment....3-22
3.3.2 Gas-Engine Driven Chillers and Heat Pumps....3-25
3.3.3 Chiller Heat Recovery....3-26
3.3.4 Exhaust Heat Recovery....3-26

3.3.5 Optional System Types 3-27
3.3.6 Combined Hydronic Systems 3-29
3.3.7 Alternate Equipment Performance Data 3-29
3.3.8 Cooling Towers Types 3-30
3.3.9 Pump Controls 3-31
3.3.10 Air Foil Centrifugal Fan with Discharge Dampers 3-31
3.3.11 Separate Control for Supply, Return and Relief Fans 3-32
3.3.12 Air Economizers Control Strategies 3-33
3.3.13 Water Side Economizers 3-34
3.3.14 Zone Terminal Controls 3-35
3.3.15 Solar Thermal Energy 3-36
3.4 Vendor Defined Optional Capabilities 3-36

4. User's Manual and Help System Requirements 4-1
4.1 Overview 4-1
4.2 Modeling Guidelines and Input References 4-2
4.3 Required Modeling Capabilities 4-2
4.3.1 General Requirements 4-2
4.3.2 Occupancies and Spaces 4-4
4.3.3 Walls, Roofs and Floors 4-9
4.3.4 Fenestration 4-13
4.3.5 Lighting 4-16
4.3.6 HVAC Systems and Plant 4-17
4.3.7 Water Heating 4-26
4.4 Optional Modeling Capabilities 4-26
4.4.1 Additions and Alterations 4-26
4.4.2 Alternative Occupancy Selection 4-28
4.4.3 HVAC Systems and Plant 4-30
4.5 Vendor Defined Optional Capabilities 4-30
4.6 Compliance Forms 4-30

5. Reference Method Comparison Tests 5-1
5.1 Overview 5-1
5.1.1 Base Case Prototype Buildings 5-2
5.1.2 Climate Zones 5-5
5.1.3 Labeling Computer Runs 5-6
5.1.4 Test Criteria 5-6
5.2 General Requirements 5-7
5.2.1 Partial Compliance Tests - A1 Series (3 tests) 5-8
5.2.2 Exterior Opaque Envelope Tests 5-9
5.2.3 Envelope Glazing Tests 5-10
5.2.4 Occupancy Tests 5-12
5.2.5 Lighting Tests - D1 Series (4 tests) 5-14
5.2.6 Ventilation Tests - E1 Series (6 tests) 5-14
5.2.7 Process Loads Tests - E2 Series (6 tests) 5-15
5.2.8 HVAC System Tests - F1 Series (5 tests) 5-15
5.2.9 System Sizing Tests - G1 Series (6 tests) 5-16
5.2.10 HVAC Distribution Efficiency Tests 5-17
5.3 Optional Capabilities Tests 5-17
5.3.1 OC Test Series - Compliance Options 5-17
5.3.2 O1 Test Series - Fan Powered VAV Boxes 5-18
5.3.3 O2 Test Series - Supply/Return Fan Options 5-18
5.3.4 O3 Test Series - Special Economizer Options 5-19
5.3.5 O4 Test Series - Special HVAC Control Option 5-19
5.3.6 O6 Test Series - Additional Chiller Options 5-20
5.3.7 O7 Test Series - Additional HVAC System Options 5-20
5.3.8 O9 Test Series - Evaporative Cooling Options 5-20

6. Vendor Requirements 6-1
6.1 Availability to Commission 6-1
6.2 Building Department Support 6-1
6.3 User Support 6-1
6.4 ACM Vendor Demonstration 6-1

7. Duct Efficiency Improvements Including HERS Required Field Verification And Diagnostic Testing for Duct Sealing 7-1
7.1 Duct Efficiency Improvements 7-1
7.2 California Home Energy Rating Systems 7-3
7.3 Summary of Documentation and Communication 7-3
7.4 Installation Certification 7-4
7.5 Field Verification and Diagnostic Testing Procedures 7-5
7.5.1 Initial Field Verification and Testing 7-5
7.5.2 Sample Field Verification and Testing 7-5
7.5.3 Re-sampling, Full Testing and Corrective Action 7-6
7.6 Third Party Quality Control Programs 7-6
7.7 Sampling for Additions or Alterations 7-7
7.8 Summary of Responsibilities 7-7
7.8.1 Builder 7-8
7.8.2 HERS Provider and Rater 7-8
7.8.3 Third-Party Quality Control Program 7-8
7.8.4 Building Department 7-9

List of Tables

Table N2-1 – Standard Design Construction Assemblies From ACM Joint Appendix IV 2-19
Table N2-2 – Occupancy Assumptions When Lighting Plans are Submitted for the Entire Building or When Lighting Compliance is not Performed 2-47
Table N2-3 – Area Occupancy Assumptions When Lighting Plans are Submitted for Portions or for the Entire Building or When Lighting Compliance is not Performed 2-48
Table N2-4 – Schedule Types of Occupancies & Sub-Occupancies 2-56
Table N2-5 – Nonresidential Occupancy Schedules (Other than Retail) 2-57
Table N2-6 – Hotel Function Occupancy Schedules 2-60
Table N2-7 – Residential Occupancy Schedules (Including Hotel/Motel Guest Rooms) With Setback Thermostat For Heating 2-61
Table N2-8 – Residential Occupancy Schedules (Including Hotel/Motel Guest Rooms) Without Setback Thermostat 2-62
Table N2-9 – Retail Occupancy Schedules 2-63
Table N2-10 – Standard Design System Selection Flowchart 2-69
Table N2-11 – System #1 and System #2 Descriptions 2-69
Table N2-12 System #3 Description 2-70
Table N2-13 System #4 Description 2-71
Table N2-14 – System #5 Description 2-72
Table N2-15 – Default Coefficients for COOL-CAP-FT, COOL-EIR-FT, HEAT-CAP-FT and HEAT-EIR-FT Equations 2-74
Table N2-16 – Data Input Requirements for Equipment Performance Curves 2-76
Table N2-17 – Minimum Nominal Efficiency for Electric Motors (%) 2-91
Table N2-18 – Pipe Head Multipliers Based on Pipe Size and Flow at Connection to the Cooling Tower 2-115
Table N2-19 – Default Capacity Coefficients for Electric Air-Cooled Chillers 2-123
Table N 2-20 – Default Capacity Coefficients for Electric Water-Cooled Chillers 2-123
Table N2-21 – Default Efficiency EIR-FT Coefficients for Air-Cooled Chillers 2-123
Table N2-22 – Default Efficiency EIR-FT Coefficients for Water-Cooled Chillers 2-123
Table N2-23 – Default Efficiency EIR-FPLR Coefficients for Air-Cooled Chillers 2-123
Table N2-24 – Default Efficiency EIR-FPLR Coefficients for Water-Cooled Chillers 2-124

Table N5-1 – Climate Zones Tested 5-6
Table N5-2 – Occupancy Mixes for Tests.....5-8
Table N5-3 – A2 Test Series Summary 5-10
Table N5-4 – F1 Test Series Summary 5-16

List of Figures

Figure N5-1 – Prototype A 5-3
Figure N5-2 – Prototype B and C.....5-4
Figure N5-3 – Prototype D.....5-5

Appendices Table of Contents

Appendix NA - Nonresidential ACM Approval Application.....NA-1

Appendix NB - Illuminance Categories and Luminaire Power NB-1
Illuminance Categories NB-1
Illuminance Categories and Luminaire Power.....NB-1

Appendix NC - Fan Motor Efficiencies.....NC-1

Appendix ND - Compliance Procedures for Relocatable Public School Buildings ND-1
ND.1 Purpose and Scope ND-1
ND.2 The Plan Check Process.....ND-1
ND.3 The Compliance Process ND-1
ND.4 Documentation.....ND-2
ND.5 Optional Features ND-3

~~Appendix NE - Approved Forms~~ NE-1

Appendix NF - Technical Databases for Test Runs NF-1

Appendix NG - Standard Procedure for Determining the Energy Efficiencies of Single-Zone Nonresidential Air Distribution Systems in Buffer Spaces or Outdoors NG-1

NG.1 Purpose and Scope NG-1
NG.2 Definitions NG-1
NG.3 Nomenclature NG-3
NG.4 Air Distribution Diagnostic Measurement and Default Assumptions NG-6
NG.4.1 Instrumentation Specifications NG-6
NG.4.2 Apparatus NG-6
NG.4.3 Procedure NG-6
NG.4.4 Delivery Effectiveness (DE) Calculations NG-17
NG.4.5 Seasonal Distribution System Efficiency NG-19
NG.4.6 Hourly Distribution System Efficiency NG-20

Appendix NH - Test Nonresidential Air Distribution Systems NH-1

Appendix NI - Alternate Default Fenestration Thermal Properties NI-1
NI.1 Solar Heat Gain Coefficient NI-1
NI.1.2 Responsibilities for SHGC Compliance NI-2
NI.2 Thermal Transmittance (U-Factor) NI-4
NI.2.1 Responsibilities for U-factor Compliance..... NI-5

Appendix NJ - Acceptance Requirements for Nonresidential Buildings NJ-1
NJ.1 Purpose and Scope NJ-1
NJ.2 Introduction..... NJ-1
NJ.3 Outdoor Air NJ-2
NJ.3.1 Variable Air Volume Systems Outdoor Air Acceptance NJ-2
NJ.3.2 Constant Volume System Outdoor Air Acceptance..... NJ-2

NJ.4 Packaged HVAC Systems NJ-2
NJ.4.1 Constant Volume Packaged HVAC Systems Acceptance NJ-3
NJ.5. Air Distribution Systems NJ-4
NJ.5.1 Air Distribution Acceptance NJ-4
NJ.6. Lighting Control Systems NJ-5
NJ.6.1 Automatic Daylighting Controls Acceptance NJ-5
NJ.6.2 Occupancy Sensor Acceptance NJ-7
NJ.6.3 Manual Daylighting Controls Acceptance NJ-7
NJ.6.4 Automatic Time Switch Control Acceptance NJ-8
NJ.7. Air Economizer Controls NJ-8
NJ.7.1 Economizer Acceptance NJ-8
NJ.8. Demand Control Ventilation (DCV) Systems NJ-9
NJ.8.1 Packaged Systems DCV Acceptance NJ-9
NJ.9. Variable Frequency Drive Systems NJ-10
NJ.9.1 Supply Fan Variable Flow Controls NJ-10
NJ.10. Hydronic System Controls Acceptance NJ-10
NJ.10.1 Variable Flow Controls NJ-10
NJ.10.2 Automatic Isolation Controls NJ-11
NJ.10.3 Supply Water Temperature Reset Controls NJ-11
NJ.10.4 Water-loop Heat Pump Controls NJ-12
NJ.10.5 Variable Frequency Drive Controls NJ-13