RESIDENTIAL ALTERNATIVE CALCULATION METHOD (ACM) APPROVAL MANUAL

for the

2005 BUILDING ENERGY EFFICIENCY STANDARDS FOR RESIDENTIAL AND NONRESIDENTIAL BUILDINGS

CALIFORNIA ENERGY COMMISSION

STANDARDS/REGULATIONS

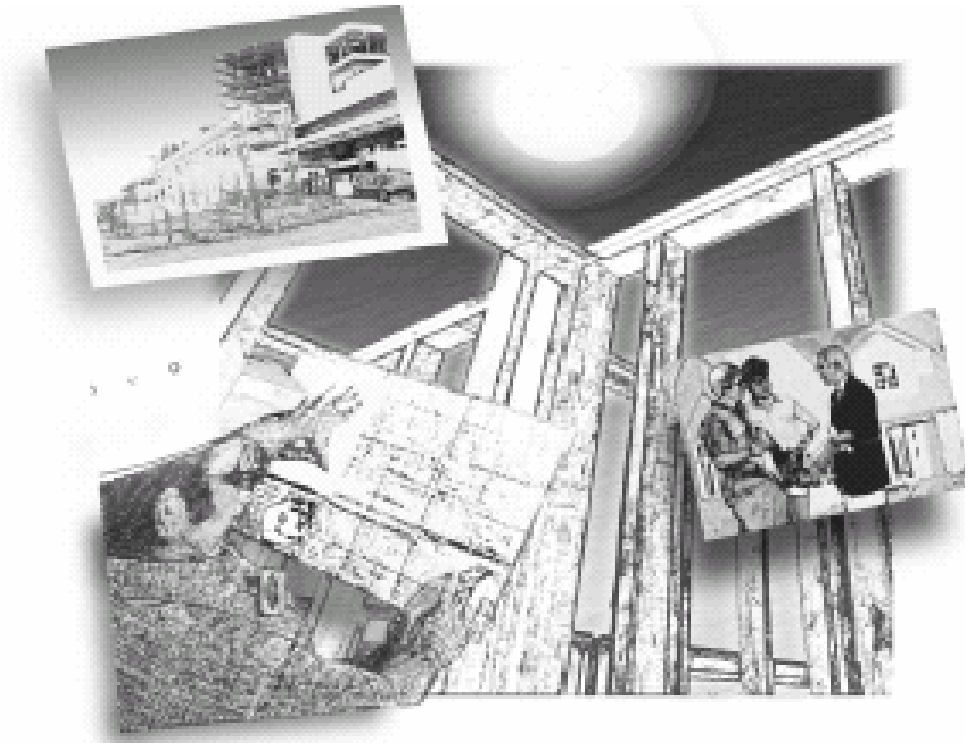

Effective October 1, 2005

OCTOBER 2004
P400-03-003F

Arnold Schwarzenegger, *Governor*

CALIFORNIA ENERGY COMMISSION

William J. Keese,
Chairman

Commissioners:
Arthur H. Rosenfeld
James D. Boyd
John L. Geesman
Jackalyne Pfannenstiel

Robert L. Therkelsen,
Executive Director

G. William Pennington,
Manager
BUILDINGS AND APPLIANCES OFFICE

Valerie T. Hall,
Deputy Director
ENERGY EFFICIENCY AND DEMAND ANALYSIS DIVISION

NOTICE

This version of the *2005 Residential Alternative Calculation Method (ACM)Approval Manual for the Building Energy Efficiency Standards* is an "unmarked" version; that is, it contains no underlined or struck-out text showing changes from the 2001 Standards (the changes are incorporated, however). A marked version is available on the Energy Commission's website or in hard copy from the Commission's Buildings and Appliances Office. Visit www.energy.ca.gov/title24, call the Title 24 Energy Efficiency hotline at 800/772-3300 (toll-free from within California) or 916/654-5106, or send email to title24@energy.state.ca.us.

Table of Contents

1. Overview 1-1
1.1 Minimum Modeling Capabilities 1-1
1.2 Optional Modeling Capabilities 1-1
1.3 Application Checklist 1-2
1.4 Types of Approval 1-2
1.5 Challenges 1-3
1.6 Decertification of ACMs 1-4
1.7 Alternative ACM Tests 1-5
1.8 Approval of New Exceptional Methods 1-5

2. Standard Reports 2-1
2.1 General 2-1
2.2 Certificate of Compliance –Residential Computer Method (CF-1R) 2-2

3. Defining the Proposed and Standard Designs 3-1
3.1 Building Physical Configuration 3-1
3.2 Opaque Envelope Elements 3-2
3.3 Fenestration and Doors 3-5
3.4 Thermal Mass 3-8
3.5 Infiltration/Ventilation 3-8
3.6 Heating and Cooling System 3-10
3.7 Water Heating 3-14
3.8 Additions and Alterations 3-17

4. Required Modeling Assumptions and Algorithms 4-1
4.1 General Modeling Assumptions 4-1
4.2 Heat Gains and Losses Through Opaque Surfaces 4-6
4.3 Heat Gains and Losses Through Fenestration 4-10
4.4 Thermal Mass 4-12
4.5 Infiltration and Natural Ventilation 4-12
4.6 Heating Systems 4-18
4.7 Air Conditioning Systems 4-19
4.8 Duct Efficiency 4-24
4.9 Hourly Attic Duct Efficiency Multipliers 4-32
4.10 Water Heating Calculations 4-34

5. Minimum Capabilities Tests 5-1
5.1 Overview 5-1
5.2 Space Conditioning Tests 5-5
5.3 Water Heating Tests (WH) 5-13

6. Optional Capabilities Tests 6-1
6.1 Overview 6-1
6.2 Optional Space Conditioning Capabilities 6-1
6.3 Solar Thermal Water Heating 6-13

7. Home Energy Rating Systems (HERS) Required Field Verification And Diagnostic Testing 7-1
7.1. California Home Energy Rating Systems 7-1
7.2. Measures Required Field Verification and Diagnostic Testing 7-1
7.3. Summary of Documentation and Communication 7-3
7.4 Installer Requirements for Installation Certification (CF-6R) 7-3
7.5 Verification and Sampling Procedures 7-4
7.6 Third Party Quality Control Programs 7-6
7.7 Sampling for Additions or Alterations 7-7
7.8 Summary of Responsibilities 7-8
7.9 Definitions of Terms Used In This Chapter 7-10

8. Compliance Supplement 8-1
8.1 CEC Approval 8-1
8.2 Program Capabilities 8-1
8.3 Standard Input/Output Report 8-1
8.4 Fixed and Restricted Inputs 8-1
8.5 Preparing Basic Input 8-2
8.6 Optional Capabilities 8-2
8.7 Special Features and Modeling Assumptions 8-2
8.8 Field Verification 8-2
8.9 Checklist for Compliance Submittal 8-2
8.10 Sample Compliance Documentation 8-2
8.11 Compliance Statement 8-2
8.12 Related Publications 8-3

9. Vendor Requirements Availability to CEC 9-1
9.1 Building Department Support 9-1
9.2 User Support 9-1
9.3 ACM Vendor Demonstration 9-1

List of Tables

Table R2-1 – HVAC Heating Equipment Descriptors 2-17
Table R2-2 – HVAC Cooling Equipment Descriptors 2-18
Table R2-3 – HVAC Distribution Type and Location Descriptors 2-19
Table R2-4 – Hydronic Terminal Descriptors 2-22
Table R2-5 – Water Heating Distribution System (Within Dwelling Units) Descriptors 2-24
Table R2-6 – Control Systems for Multi-Unit Distribution Systems 2-24
Table R2-7 – Water Heater Types 2-25
Table R2-8 – Pipe Conditions for Systems Serving Multiple Dwelling Units 2-25
Table R2-9 – Water Heater Input Summary 2-27
Table R3-1 – Ceiling/Roof U-factors for Standard Design 3-3
Table R3-2 – Wall U-factors for the Standard Design 3-4
Table R3-3 – Floor U-factors for the Standard Design 3-4
Table R3-4 – Slab Edge F-factors for the Standard Design 3-5
Table R3-5 – Allowed Interior Shading Devices and Recommended Descriptors 3-7
Table R3-6 – Standard Design Shading Conditions 3-7
Table R3-7 – Allowed Exterior Shading Devices and Recommended Descriptors 3-8
Table R3-8 – Water Heater Distribution System Choices (Within the Dwelling Unit) 3-15
Table R3-9 – Multiple Dwelling Unit Recirculating System Control Choices 3-15
Table R3-10 – Specification of Standard Design Water Heater 3-16
Table R3-11 – Default Assumptions for Existing Buildings 3-22
Table R4-1 – Hourly Thermostat Set Points 4-2
Table R4-2 – Hourly Internal Gain Schedules 4-5
Table R4-3 – Seasonal Internal Gain Multipliers 4-5
Table R4-4 – Modeling Rules for insulation installation Quality 4-8
Table R4-5 – Monthly and Annual Average Ground Temperatures 4-9
Table R4-6 – Earth Temperatures for Modeling Basement Walls and Floors 4-9
Table R4-7 – Polynomial Coefficients for Angular Dependence 4-11
Table R4-8 – Infiltration Coefficients 4-15
Table R4-9 – Airflow Criteria 4-24
Table R4-10 – Duct Efficiency Input Parameters and Defaults 4-24
Table R4-11 – Location of Default Supply Duct Area 4-25
Table R4-12 – Buried Duct Effective R-values 4-28
Table R4-13 – Duct Leakage Factors 4-29
Table R4-14 – Assumptions for Duct Ambient Temperature (ºF) 4-31

Table R4-15 – Thermal Regain Factors 4-32
Table R4-16 – Coefficients....4-34
Table R4-17 – Seasonal Sol-Air Temperature Difference, °F 4-34
Table R5-1 – Summary of the Space Conditioning Tests 5-7
Table R5-2 – Standard Design Tests 5-11
Table R5-3 – Neutral Variable Design Tests – Space Conditioning....5-11
Table R5-4 – Summary of the Addition-Alone Tests....5-12
Table R5-5 – Summary Existing + Addition + Alternation Tests 5-13
Table R5-6 – Base Case Water Heating Systems....5-14
Table R5-7 – Accuracy Tests – Water Heating 5-15
Table R5-8 – Standard Design Equivalent Tests – Water Heating 5-16
Table R5-9 – Neutral Variable Tests – Water Heating....5-16
Table R6-1 – Summary of the Optional Space Conditioning Tests 6-2
Table R6-2 – Annual Pipe Loss Rates (kBtu/y-ft)....6-6
Table R6-3 – Combined Hydronic System Specifications 6-7
Table R6-4 – OG-300 Solar Systems Tests....6-15
Table R6-5 – Prototype Solar System....6-15
Table R6-6 – OG 100 Solar System Tests 6-16
Table R7-1 – Summary of Measures Requiring Field Verification and Diagnostic Testing....7-2

List of Figures

Figure R2-1 – Overhang Dimensions 2-10
Figure R2-2 – Side Fin Dimensions 2-11
Figure R3-1 – Surface Definitions 3-3
Figure R5-1 – Testing Concept – Discrete Modifications Produce Positive Compliance Margin....5-2
Figure R5-2 – Testing Concept – Discrete Modifications Produce Negative Compliance Margin 5-2
Figure R5-3 – Testing Concept – Discrete Modifications Produce Positive But Small Compliance Margin 5-3
Figure R5-4 – Testing Concept – Discrete Modifications Produce Negative But Small Compliance Margin 5-3
Figure R5-5 – Custom Budget Tests....5-4
Figure R5-6 – Labeling of Computer Simulations 5-5
Figure R5-7 – Prototype Buildings A and B 5-6
Figure R5-8 – Overhang Characteristics 5-9
Figure R5-9 – Side Fins for Optional Capabilities Test 5-10
Figure R5-10 – Prototypes E and F 5-12
Figure R6-1 – Section at Crawlspace Perimeter 6-8
Figure R6-2 – Zoning the Prototype Building 6-10
Figure R6-3 – Sunspace Prototype 6-11
Figure R6-4 – Sunspace Section 6-12

Appendices Table of Contents

Appendix RA – Certification of Alternative Calculation Method RA-1
RA.1 Space Conditioning Tests (SC) RA-2
RA.2 Standard Design Tests (SD) RA-11
RA.3 Additions and Alterations Tests....RA-14
RA.4 Water Heating Tests RA-16
RA.5 Water Heating Neutral Variable Tests (WD)....RA-21
RA.6 Optional Capabilities Tests (OC)....RA-22
RA.7 Solar Systems Tests (SS) RA-27

Appendix RB – Interior Mass Capacity....RB-1
RB.1 Scope and Purpose....RB-1

RB.2 Calculating Interior Mass Capacity (IMC) RB-1
RB.3 IMC Threshold for a High Mass Building RB-1
RB.4 Table Notes RB-5

Appendix RC – Procedures for Field Verification and Diagnostic Testing of Air Distribution Systems ..RC-1
RC.1 Purpose and Scope RC-1
RC.2 Instrumentation Specifications RC-1
RC.3 Apparatus RC-2
RC.4 Procedures RC-2

Appendix RD – Procedures for Determining Refrigerant Charge for Split System Space Cooling Systems without Thermostatic Expansion Valves RD-1
RD.1 Purpose and Scope RD-1
RD.2 Standard Charge Measurement Procedure RD-1
RD.3 Alternate Charge Measurement Procedure RD-5

Appendix RE – Field Verification and Diagnostic Testing of Forced Air System Fan Flow and Air Handler Fan Watt Draw RE-1
RE.1 Purpose and Scope RE-1
RE.2 Instrumentation Specifications RE-1
RE.3 Apparatus RE-2
RE.4 Procedure RE-2

Appendix RF – HVAC Sizing RF-1
RF.1 Purpose and Scope RF-1
RF.2 Procedure for Calculating Design Cooling Capacity RF-1
RF.3 Procedure for Calculating Maximum Cooling Capacity for ACM Credit RF-3
RF.4 Procedure for Determining Electrical Input Exception for Maximum Cooling Capacity for ACM Credit RF-3

Appendix RG – Water Heating Calculation Method RG-1
RG.1 Purpose and Scope RG-1
RG.2 Water Heating Systems RG-2
RG.3 Hourly Adjusted Recovery Load RG-2
RG.4 Energy Use of Individual Water Heaters RG-14
RG.5 Electricity Use for Circulation Pumping RG-19

Appendix RH – High Quality Insulation Installation Procedures RH-1
RH.1. Purpose and Scope RH-1
RH.2 Terminology RH-1
RH.3 Raised Floors and Floors Over Garages RH-2
RH.4. Wall Insulation RH-2
RH.5 Ceiling and Roof Insulation RH-4
RH.6 Materials RH-6
RH.7 Equipment RH-6
RH.8 R-Value and U-Value Specifications RH-6
RH.9. Certificates RH-6
RH.10 Certificate Availability RH-6
CF-6R & CF-4R Insulation Installation Quality Certificate RH-7

Appendix RI – Procedures for Verifying the Presence of a Thermostatic Expansion Valve or High Energy Efficiency Ratio Equipment RI-1
RI.1 Purpose and Scope RI-1
RI.2 TXV Verification Procedure RI-1
RI.3 Time Delay Relay Verification Procedure RI-1
RI.4 Matched Equipment Procedure RI-2